


thermostats

TOTAL SYSTEM CONTROL



The 5259 is a slimline, unobtrusive underfloor heating thermostat with fully functional LCD touchscreen display. White, Satin Black and Chrome available.

- ✓ LED backlit touchscreen display
- ✓ Full 7 day, 6 event heating schedule
- ✓ Fits on an extra deep back box
- ✓ Available in 3 colours
- ✓ White, chrome and black options
- ✓ Control up to 16A or 3600W UFH

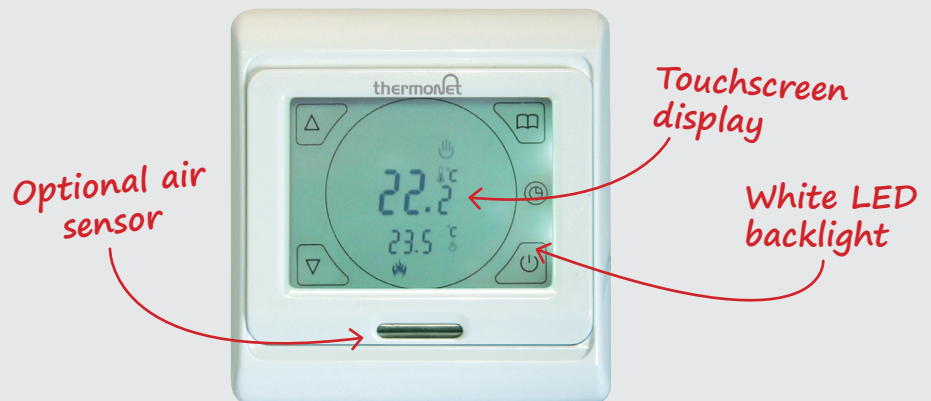

CUSTOMISED HEATING SCHEDULE

The 5259 fits any interior and provides ultimate control of your underfloor heating system.

Rising energy costs are forcing us to be more careful about our energy use and the 5259 features a 7 day, 6 event programmable heating schedule which can be set up to provide efficient heating that fits perfectly with your lifestyle.

ENHANCE EVERY PROJECT

Enhance your project with Thermonet™ electric underfloor heating. The Thermonet® feeling brings you the ultimate in comfort, luxury and after sales backup.

INCLUDED IN THE RANGE

5265 Programmable Thermostat
 5250 Manual Thermostat
 5259 White Touchscreen Thermostat
 5257 Satin Black Touchscreen Thermostat
 5255 Chromed Touchscreen Thermostat
 5253 Custom Colour Fascia Kit (for 5259)

WHAT'S IN THE BOX?

5259 Thermostat
 Fixing Plate
 Fixing Screws
 Sensor Probe
 Sensor Conduit
 Installation Guide

THREE YEAR
WARRANTY

3

THERMOSTAT LOCATION

Ideally, thermostats should be located within the room to be heated, subject to current electrical regulations relating to bathrooms and wet areas.

As the thermostat is floor sensing it can be installed out-side the room or in a cupboard if necessary.

For easy operation and access to controls choose a location about 1.3m above the floor.

Should a remote location for the thermostat be necessary, the system wiring can be extended up to 50m from the installation using 0.75mm twin core flex.

MAXIMUM LOAD


The 5259 can control underfloor heating systems of up to 16A or 3600W.

LARGE AREAS OVER 16A


For areas exceeding 16A that require control by a single thermostat, a contactor/snubber must be used.

Contactor/snubbers are available in our electrical accessories range.

Call 0800 019 5899 for more information or visit www.thermogroupuk.com

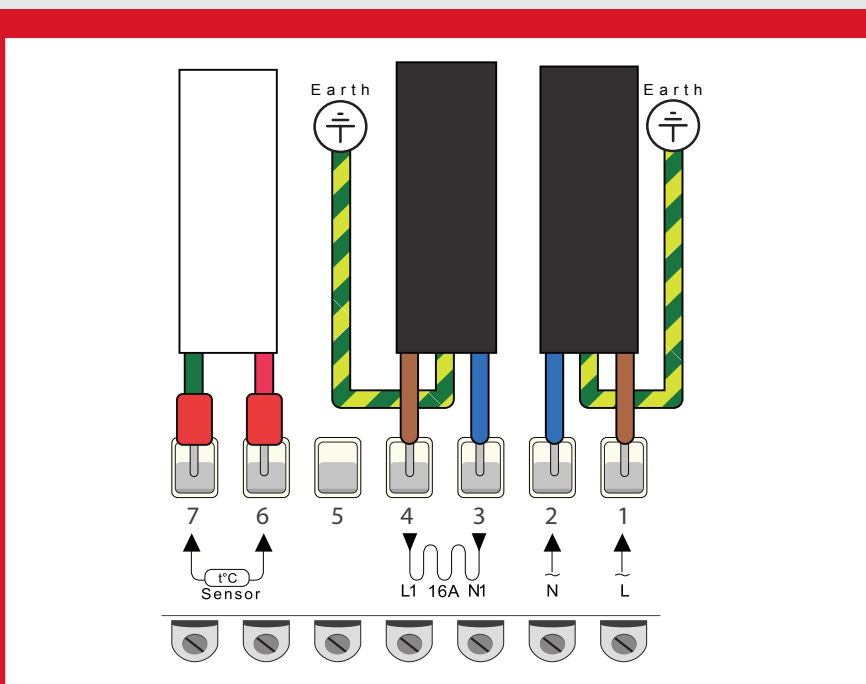

Simple installation and wiring process

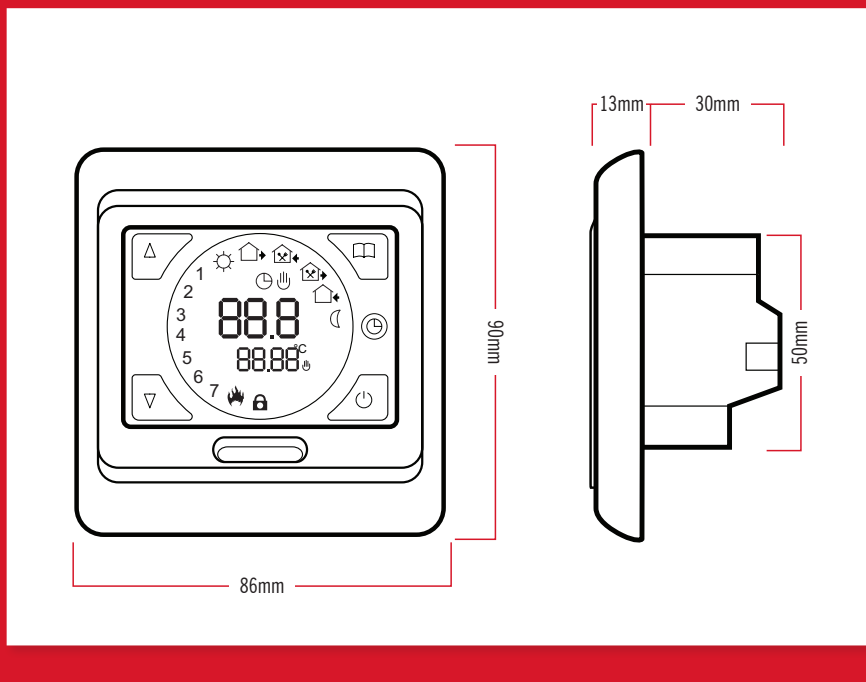

Technical Data

Sensor Modes	Floor, Air, F/A
Voltage	230V
Consumption	2W
Max Load	16A 3600W
Setting Range	5 - 90°C
Storage Temp	-20 - 50°C
Protection	IP32
PVC Housing	Anti Flammable
Height	90mm
Width	86mm
Depth	43mm
To Wall	13mm

Warranty Details
All of our thermostats are covered by a 3 year limited manufacturer guarantee.

CONTACT US ONLINE

Browse our full product range, watch videos, download product literature and get a quote, all on the Thermogroup UK website.

www.thermogroupuk.com

CONTACT US BY PHONE

Got a question or query?
Call our UK support line free from your land line. Open 07:30 - 16:30 Mon - Fri

0800 019 5899

CONTACT US BY MAIL

Tell your satnav where to find us or just write us a letter to say hello!

Thermogroup UK, Bridge House, Hop Pocket Lane, Paddock Wood, Kent. TN12 6DQ.